

08/24/00

901 U.S. PTO

08-28-00

A

Docket No. 4215/PDD/CMP/RKK

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application  
 Assistant Commissioner for Patents  
 Washington, D.C. 20231

Re: Inventor(s): Lizhong Sun, Shijian Li, Fred C. Redeker  
 Title: CU CMP POLISHING PAD CLEANING

Transmitted herewith is the patent application identified above, including:

- ☒ Specification, claims and abstract, totaling 15 pages.
- ☒ Drawings totaling    pages,    Formal 2 Informal.
- ☒ Executed Declaration and Power of Attorney.
- ☒ Assignment of the invention to Applied Materials, Inc.
- ☒ Assignment Recordation Cover Sheet

901 U.S. PTO  
 09/645690  
 08/24/00

FEE CALCULATION					
Fee Items	Claims Filed	Included With Basic Fee	Extra Claims	Fee Rate	Total
Total Claims	-25-	- 20 =	-5-	X \$22.00	-\$110.00-
Independent Claims	-3-	- 3 =	-0-	X \$82.00	-0-
Basic Filing Fee				\$690.00	\$690.00
TOTAL FEES					\$800.00

- ☒ The Commissioner is hereby authorized to charge \$800.00 to Deposit Account No. 50-1074
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 50-1074. A duplicate copy of this transmittal is enclosed.
- ☒ Please address all future correspondence to:

PATENT COUNSEL  
 APPLIED MATERIALS, INC.  
 Legal Affairs Department  
 P.O. BOX 450A  
 Santa Clara, CA. 95052

I hereby certify that this correspondence is being deposited with the United States Postal Service as express mail in an envelope addressed to Box Patent Application, Assistant Commissioner for Patents, Washington, D C 20231

Express Mail Receipt No. E435691511345

Date of Deposit 8-24-2000

Signature Robert W. Mulcahy

Respectfully submitted,

Robert W. Mulcahy  
 Registration No. 25,436

## CU CMP POLISHING PAD CLEANING

## TECHNICAL FIELD

The present invention relates generally to semiconductor processing, particularly chemical-mechanical polishing (CMP). The present invention is applicable to polishing pads employed in CMP, particularly to reducing polishing defects.

## 5 BACKGROUND ART

Current semiconductor processing typically comprises forming an integrated circuit containing a plurality of conductive patterns on vertically stacked levels connected by vias and insulated by inter-layer dielectrics. As device geometry plunges into the deep sub-micron range, chips comprising five or more levels of metallization are formed.

10 In manufacturing multi-level semiconductor devices, it is necessary to form each level with a high degree surface planarity, avoiding surface topography, such as bumps or areas of unequal elevation, i.e., surface irregularities. In printing photolithographic patterns having reduced geometry dictated by the increasing demands for miniaturization, a shallow depth of focus is required. The presence of surface irregularities can exceed the  
15 depth of focus limitations of conventional photolithographic equipment. Accordingly, it is essential to provide flat planar surfaces in forming levels of a semiconductor device. In order to maintain acceptable yield and device performance, conventional semiconductor methodology involves some type of planarization or leveling technique at suitable points in the manufacturing process.

20 A conventional planarization technique for eliminating or substantially reducing surface irregularities is CMP wherein abrasive and chemical action is applied to the surface of the wafer undergoing planarization. The polishing pad is employed together with a chemical agent to remove material from the wafer surface.

Fig. 1 is a schematic top plan view of a conventional CMP apparatus 11  
25 comprising a rotatable platen 15 on which is mounted a polishing pad 17 for polishing semiconductor substrate S. The polishing pad 17 can be a conventional slurry-type pad having a plurality of concentric circumferential grooves 19 as illustrated, or a fixed abrasive-type polishing pad.

CMP apparatus 11 further comprises a pivot arm 21, a holder or conditioning head 23 mounted to one end of the pivot arm 21, a pad conditioner 25, such as a pad embedded with diamond crystals, mounted to the underside of the conditioning head 23, a slurry source such as a slurry/rinse arm 27, and a substrate mounting head 29 operatively coupled to platen 15 to urge substrate S against the working surface of polishing pad 17. Pivot arm 21 is operatively coupled to platen 15, and maintains conditioning head 23 against the polishing pad 17 as the pivot arm 21 sweeps back and forth across the radius of polishing pad 17 in an arcing motion. Slurry/rinse arm 27 is stationarily positioned outside the sweep of the pivot arm 21 and the conditioning head 23 coupled thereto.

In operation, the substrate S is placed face down beneath the substrate mounting head 29, and the substrate mounting head 29 presses the substrate S firmly against the polishing pad 17. Slurry is introduced to the polishing pad 17 via slurry/rinse arm 27, and platen 15 rotates as indicated by arrow  $R_1$ . Pivot arm 21 scans from side to side in an arcing motion as indicated by arrow  $S_1$ .

When the pad is grooved, then grooves 19 channel the slurry (not shown) between the substrate S and the polishing pad 17. The semi-porous surface of the polishing pad 17 becomes saturated with slurry which, with the downward force of the substrate mounting head 29 and the rotation of the platen 15, abrades and planarizes the surface of the substrate S. The diamond crystals (not shown) embedded in the rotating conditioner 25 continually roughen the surface of the polishing pad 17 to ensure consistent polishing rates. Pad cleaning must be performed frequently to clean polishing residue and compacted slurry from the polishing pad 17.

Conventional pad cleaning techniques employ rinsing wherein the substrate mounting head 29 is removed from contact with the polishing pad 17, the supply of slurry from the slurry/rinse arm 27 is turned off, and a rinsing fluid such as deionized water is supplied via the slurry/rinse arm 27. However, merely rinsing the polishing pad following CMP is often ineffective in removing polishing residues, particularly after CMP of metal films, because polishing by-products stick to the polishing pad.

Conventional polishing pads employed in abrasive slurry processing typically comprise a grooved porous polymeric surface, such as polyurethane, and the abrasive slurry varied in accordance with the particular material undergoing CMP. Basically, the abrasive slurry is impregnated into the pores of the polymeric surface while the grooves convey the abrasive slurry to the wafer undergoing CMP. Another type of polishing pad is a fixed abrasive pad wherein abrasive elements are mounted on a backing. When

conducting CMP with a fixed abrasive pad, a chemical agent without abrasive particles is applied to the pad surface.

When conducting CMP on a metal-containing surface, e.g., Cu or a Cu alloy, the working or polishing surface of the polishing pad undergoes changes believed to be caused by, inter alia, polishing by-products resulting from the reaction of metal being removed from the wafer surface, such as Cu, with components of the CMP slurry or chemical agent, e.g., oxidizer, complexing agents and inhibitors. Such by-products typically deposit onto the polishing pad and accumulate causing a colored stain or glazed area. Such a surface exhibits a lower coefficient of friction and, hence, a substantially lower material removal rate by adversely impacting polishing uniformity and increasing polishing time. In addition, such glazing causes scratching of the wafer surface. Conventional approaches to remedy pad glazing include pad conditioning, as with nylon brushes or diamond disks for removing the deposited by-products from the polishing pad surface. However, such a conventional remedial approach to the glazing problem is not particularly effective in completely removing glazing. Pad conditioning with a diamond disk also greatly reduces pad lifetime.

There exists a need for methodology enabling the planarization of a wafer surface containing Cu or Cu alloy with reduced pad glazing. There exists a particular need for methodology enabling CMP of a wafer surface containing Cu or Cu alloys at high production throughput.

## SUMMARY OF THE INVENTION

An aspect of the present invention is a method of cleaning a polishing pad surface to prevent or substantially reduce pad glazing stemming from conducting CMP on a wafer surface containing Cu or Cu alloy.

Another aspect of the present invention is an apparatus for conducting a CMP on a wafer surface containing Cu or Cu alloy with significantly reduced pad glazing.

Additional aspects of the present invention will be set forth in the description which follows and in part will be apparent to those having ordinary skill in the art upon examination of the following or may be learned from the practice of the present invention.

The aspects of the present invention may be realized and obtained as particularly pointed out in the appended claims.

According to the present invention, the foregoing and other aspects are achieved in part by a method of cleaning a polishing pad surface subsequent to CMP a wafer surface

containing Cu or a Cu alloy, the method comprising applying to the polishing pad surface a cleaning composition comprising: about 0.2 to about 3.0 wt.% of at least one organic compound containing one or more amine or amide groups; an acid or a base in amount such that the composition has a pH of about 5.0 to about 12.0; and water, e.g., deionized water.

Another aspect of the present invention is a method comprising the sequential steps: (a) conducting CMP on a first wafer surface containing Cu or a Cu alloy on a surface of a polishing pad; (b) applying to the polishing pad surface a cleaning composition comprising: about 0.2 to about 3.0 wt.% of at least one organic compound containing one or more amine or amide groups; an acid or a base in an amount such that the composition has a pH of about 5.0 to about 12.0 and water; (c) rinsing the polishing pad surface with water to remove any cleaning composition on the polishing pad surface; (d) conducting CMP on a second wafer surface; and (e) repeating steps (b) through (d).

A further aspect of the present invention is an apparatus for conducting CMP on a wafer surface containing Cu or a Cu alloy, the apparatus comprising: a platen; a polishing sheet or pad mounted on the platen; a first dispenser adapted to dispense a cleaning composition on a working surface of the polishing sheet or pad; and a source of the cleaning composition coupled to the first dispenser, the cleaning composition comprising: about 0.2 to about 3.0 wt.% of at least one organic compound containing one or more amine or amide groups; an acid or a base in an amount sufficient such that the cleaning composition has a pH of about 5.0 to about 12.0; and water.

Embodiments of the present invention comprise conducting CMP on a plurality of wafers having a surface containing Cu or a Cu alloy. After each wafer is subjected to CMP, the polishing pad surface is cleaned with a cleaning solution having a pH of about 5.0 to about 12.0, e.g., about 8 to about 11, containing at least one organic compound having one or more amine or amide groups, such as ethylenediamine, an acid such as phosphoric acid, acetic acid and sulfuric acid, or a base, such as potassium, sodium or ammonium hydroxide, and water. The cleaning solution is then rinsed away from the polishing pad surface with pressurized water. Pad conditioning can also be implemented before, during and/or after applying the cleaning solution. Embodiments of the present invention further include an apparatus containing a first dispenser for dispensing the cleaning solution and, a second dispenser for rinsing the polishing pad surface after application of the cleaning solution, and a computer programmed to implement CMP, polishing pad surface cleaning and polishing pad surface rinsing.

Additional aspects of the present invention will become readily apparent to those skilled in this art from the following detailed description, wherein embodiments of the present invention are described, simply by way of illustration of the best mode contemplated for carrying out the present invention. As will be realized, the present invention is capable of other and different embodiments, and its several details are capable of modifications in various obvious respects, all without departing from the present invention. Accordingly, the drawings and description are to be regarded as illustrative in nature, and not as restrictive.

#### BRIEF DESCRIPTION OF DRAWINGS

Fig. 1 schematically illustrates a conventional CMP apparatus.

Fig. 2 schematically illustrates a CMP apparatus in accordance with an embodiment of the present invention.

#### DESCRIPTION OF THE INVENTION

The present invention addresses and solves the pad glazing problem attendant upon conducting CMP on a wafer surface containing Cu and/or Cu alloys. As employed throughout this disclosure, the symbol Cu is intended to encompass high purity elemental copper as well as copper-based alloys, e.g., copper alloys containing about 80% of copper and greater. As also employed throughout this disclosure, the expression "ex situ" treatment is intended to encompass polishing pad treatment conducted while a wafer is not in contact with the polishing pad and/or undergoing CMP.

Pad glazing attendant upon conducting CMP of a wafer surface containing Cu adversely impacts the uniformity and polishing rate of CMP. Accordingly, pad conditioning is conventional conducted, notably with a diamond disk. It is believed that pad glazing stems from the accumulation of polishing by-products, particularly Cu-complexes with slurry components, such as complexing agents and inhibitors.

The present invention addresses and solves the pad glazing problem attendant upon conducting CMP of a wafer surface containing Cu by addressing the source of the problem, i.e., by removing the Cu-containing polishing by-products before such polishing by-products transform into a glazing on the pad surface. In accordance with embodiments of the present invention, after conducting CMP on a wafer surface containing Cu, the polishing pad working surface is treated with a cleaning composition comprising about 0.1 to about 3.0, e.g., about 0.5 to about 1.0 wt.% of at least one organic compound containing

one or more amine or amide groups, an acid or a base in a sufficient amount such that the composition has a pH of about 5.0 to about 12.0 and water. Subsequent to cleaning, the polishing pad surface is rinsed with water, as by water under pressure, to remove the cleaning solution prior to initiating CMP on a subsequent wafer.

- 5           Embodiments of the present invention further include optional conditioning the pad surface to remove any glazing which may occur, as by employing a conventional disk, before, during and/or after treatment with the cleaning composition.

Embodiments of the present invention comprise treating the polishing pad surface with a solution having a pH of about 5.0 to about 12.0, e.g., about 8 to about 11, and  
10   containing ethylenediamine and phosphoric acid, acetic acid or sulfuric acid, the remainder deionized water. Given the present disclosure and objectives, the optimum flow rate and time for treating a polishing pad surface can be determined in a particular situation. For example, it was found suitably to apply the cleaning solution to a rotating polishing pad at a flow rate of about 100 to about 600 ml/min, e.g., about 100 to about  
15   200 ml/min, for about 3 to about 20 seconds. The solution can then be removed from the polishing pad surface by applying pressurized deionized water for about 2 to about 20 seconds.

It was found that the sequential treatment of a polishing pad surface with a cleaning solution containing at least one organic compound having one or more amine or  
20   amide groups, an acid or a base and water followed by rinsing with water significantly reduces pad glazing, increases wafer to wafer rate uniformity and reduces wafer scratches. The exact mechanism underpinning the significant reduction in pad glazing attendant upon employing a cleaning solution in accordance with embodiments of the present invention is not known with certainty. However, it is believed that the organic compound or  
25   compounds containing at least one amine or amide groups, such as ethylenediamine, forms water soluble complexes with Cu and/or the Cu-containing CMP by-products, which complexes dissolve in water. Upon subsequent rinsing with water, the remaining cleaning composition and solubilized by-products are removed, thereby preventing and/or significantly reducing the formation of pad glazing in an efficient, cost effective manner.

- 30           Embodiments of the present invention, therefore, comprise a method of conducting CMP on a plurality of individual wafers having a surface containing Cu. After each wafer is planarized, the polishing pad surface is treated with a cleaning solution and then rinsed, in accordance with embodiments of the present invention, to prevent and/or significantly

reduce pad glazing, thereby improving wafer to wafer rate uniformity and reducing wafer scratches.

Embodiments of the present invention further include polishing apparatus comprising various types of platens, including linear platens and apparatuses comprising  
 5 at least one platen, a polishing pad or sheet mounted on the platen, a first dispenser for dispensing a cleaning solution containing the organic compound or compounds having one or more amine groups, an acid or a base sufficient to achieve a solution pH of about 5.0 to about 12.0, and water, a second dispenser for dispensing water, e.g., pressurized water, on the polishing pad surface to remove the cleaning solution and dissolved CMP by-products  
 10 prior to initiating CMP of a subsequent wafer. An apparatus in accordance with embodiments of the present invention can also include a controller programmed for dispensing the cleaning solution onto the polishing pad surface and for rinsing the polishing pad surface to remove the remaining cleaning solution and dissolved polishing by-products prior to initiating CMP of a subsequent wafer. The apparatus can also be  
 15 programmed for implementing polishing pad conditioning before, during and/or after treatment of the pad surface with a cleaning solution.

An apparatus in accordance with an embodiment of the present invention is schematically illustrated in Fig. 2. The inventive apparatus 31 comprises many components described with reference to the conventional apparatus 11 illustrated in Fig. 1.  
 20 However, the inventive apparatus 31 further comprises a source of cleaning solution 33, having a pH of about 5.0 to about 12.0 and comprising at least one organic compound having at least one amine or amide groups, e.g., ethylenediamine, an acid, e.g., phosphoric acid, acetic acid or sulfuric acid, or a base, such as potassium, sodium, or ammonium hydroxide, and water, e.g., deionized water, coupled to slurry/rinse arm 27, and a  
 25 controller 35 coupled to the platen 15, pivot arm 21, slurry/rinse arm 27 and the source of cleaning solution 33. Additionally, source of rinsing fluid 39 (e.g., a source of deionized water) is coupled to the slurry/rinse arm 27 and the controller 35. Controller 35 can be programmed for controlling all aspects of operation, including CMP of a substrate S on polishing pad 17, conditioning the polishing pad 17 via pivot arm 21, dispensing (via  
 30 slurry/rinse arm 27) cleaning solution from the source of cleaning solution 33, and dispensing rinsing fluid from the source of rinsing fluid 39.

In operation, a substrate S is placed face down beneath the substrate mounting head 29, and the substrate mounting head 29 presses the substrate S firmly against the polishing pad 17. Slurry is introduced to the polishing pad 17 via slurry/rinse arm 27, and



platen 15 rotates as indicated by arrow  $R_1$ . Pivot arm 21 scans from side to side in an arcing motion as indicated by arrow  $S_1$ .

If the pad is grooved, the grooves 19 channel the slurry (not shown) between the substrate S and the polishing pad 17. The semi-porous surface of the polishing pad 17 becomes saturated with slurry which, with the downward force of the substrate mounting head 29 and the rotation of the platen 15, abrades and planarizes the surface of the substrate S. The diamond crystals (not shown) embedded in the rotating conditioner 25 continually roughen the surface of the polishing pad 17 to ensure consistent polishing rates, if necessary.

Unlike conventional pad cleaning techniques which merely use a rinsing fluid such as de-ionized water to remove slurry particles and polishing residue, the inventive apparatus 31 employs a cleaning solution having a chemistry adapted to improve pad cleaning. Specifically, the cleaning solution has a chemistry adapted to solubilize Cu-containing CMP residue on the surface of polishing pad 17 before glazing occurs. In this manner, even difficult to remove Cu-containing compounds in the solid state, can be cleaned from the polishing pad 17 in an efficient, cost effective manner. Subsequently, the surface of polishing pad 17 is rinsed as with pressurized deionized water dispensed from slurry/rinse arm 27.

The present invention advantageously significantly reduces polishing pad glazing at its source by solubilizing and removing Cu-containing CMP residue before glazing occurs on the polishing pad surface. The present invention can be implemented in a cost effective, efficient manner employing conventional materials and chemicals, with minor modifications to existing CMP devices. The present invention significantly improves wafer-to-wafer CMP rate uniformity and, at the same time, significantly reduces wafer scratches, in a cost effective and efficient manner.

The present invention is applicable to the manufacture of various types of semiconductor devices. The present invention is particularly applicable to manufacturing multi-level semiconductor devices having sub-micron features.

In the previous description, numerous specific details are set forth, such as specific materials, structures, chemicals, processes, etc., to provide a better understanding of the present invention. However, the present invention can be practiced without resorting to the details specifically set forth. In other instances, well known methodology, materials and features have not been described in detail in order not to unnecessarily obscure the present invention.

Only the preferred embodiment of the present invention and but a few examples of its versatility are shown and described in the present disclosure. It is to be understood that the present invention is capable of use in various other combinations and environments and capable of changes or modifications within the scope of the inventive concept as

5 expressed herein.

## WHAT IS CLAIMED IS:

1. A method of cleaning a polishing pad surface subsequent to chemical-mechanical polishing (CMP) a wafer surface containing copper (Cu) or a Cu-based alloy, the method comprising applying to the polishing pad surface a cleaning composition comprising:

- 5                   about 0.1 to about 3.0 wt.% of at least one organic compound containing one or more amine or amide groups;  
                     an acid or a base in an amount such that the composition has a pH of about 5.0 to about 12.0; and  
                     water.

2. The method according to claim 1, wherein the composition is a solution comprising;

- ethylenediamine;  
                     an acid selected from the group consisting of phosphoric acid, acetic acid  
 5   and sulfuric acid, or a base selected from the group consisting of potassium hydroxide, sodium hydroxide and ammonium hydroxide; and  
                     the remainder deionized water.

3. The method according to claim 1, wherein the composition is a solution consisting essentially of the organic compound, the acid or base and deionized water.

4. The method according to claim 1, wherein the composition is a solution having a pH of about 5.0 to about 12.0.

5. The method according to claim 1, wherein:  
                     the organic compound forms at least one complex with Cu and/or Cu-containing by-products generated during CMP; and  
                     the at least one complex is (are) dissolved in the deionized water.

6. The method according to claim 4, comprising applying the solution to a rotating polishing pad at a flow rate of about 100 to about 600 ml/min.

7. The method according to claim 6, comprising applying the solution to the polishing pad for about 3 seconds to about 20 seconds after conducting CMP on each of a plurality of wafers having a surface comprising Cu or Cu alloy.

8. The method according to claim 1, further comprising rinsing the polishing pad surface with water to remove any cleaning solution from the polishing pad surface, after applying the solution and prior to conducting CMP on a subsequent wafer.

9. The method according to claim 8, comprising rinsing by applying pressurized water to the polishing pad surface for about 2 seconds to about 20 seconds.

10. The method according to claim 1, further comprising removing any substrates from the wafer surface before applying the cleaning composition to the polishing pad surface.

11. The method according to claim 1, comprising conditioning the polishing pad surface at least one of before, during and after applying the cleaning solution.

12. A method comprising the sequential steps:

(a) conducting chemical-mechanical polishing (CMP) on a first wafer surface containing copper (Cu) or a Cu-based alloy on a surface of a polishing pad;

(b) removing the wafer from the pad;

(c) applying to the polishing pad surface a cleaning composition comprising:

about 0.1 to about 3.0 wt.% of at least one organic compound containing one or more amine or amide groups;

an acid or a base in an amount such that the composition has a pH of about 5.0 to about 12.0; and water;

(d) rinsing the polishing pad surface with water to remove any cleaning composition on the polishing surface;

(e) conducting CMP on a second wafer; and

(f) repeating steps (b) through (e).

13. The method according to claim 12, wherein the composition is a solution comprising:

ethylenediamine;

an acid selected from the group consisting of phosphoric acid, acetic acid

5 and sulfuric acid, or a base selected from the group consisting of potassium hydroxide, sodium hydroxide and ammonium hydroxide; and

the remainder deionized water.

14. The method according to claim 12, wherein the composition is a solution consisting essentially of the organic compound, the acid or base and deionized water.

15. The method according to claim 12, wherein the composition is a solution having a pH of about 5.0 to about 12.0.

16. The method according to claim 12, wherein;

Cu and/or Cu containing by-products are generated during CMP on the surface of the polishing pad;

5 the at least one organic compound forms at least one complex with the Cu and/or Cu-containing by-products;

the at least one complex is (are) dissolved in the water; and

the cleaning composition containing the dissolved complexes are removed during rinsing.

17. The method according to claim 15, comprising applying the solution to a rotating polishing pad at a flow rate of about 100 to about 600 ml/min.

18. The method according to claim 17, comprising applying the composition to the rotating polishing pad for about 3 seconds to about 20 seconds.

19. An apparatus for conducting chemical-mechanical polishing (CMP) on a wafer surface containing copper (Cu) or a Cu alloy, the apparatus comprising;

a platen;

a polishing pad or sheet mounted on the platen;

5 a first dispenser adapted to dispense a cleaning composition on a working surface on the polishing pad or sheet; and

a source of the cleaning composition coupled to the first dispenser, the cleaning composition comprising;

- about 0.1 to about 3.0 wt.% of at least one organic compound  
 10 containing one or more amine or amide groups;  
 an acid or a base in an amount in such that the cleaning composition has a pH of about 5.0 to about 12.0; and  
 the remainder water.

20. The apparatus according to claim 19, further comprising:

a second dispenser adapted to dispense water on a working surface of the polishing pad; and  
 a source of water coupled to the second dispenser.

21. The apparatus according to claim 20, wherein the second dispenser is adapted to dispense water under pressure.

22. The apparatus according to claim 20, further comprising a controller having a program for:

dispensing the cleaning composition on the polishing pad after conducting CMP on the wafer surface; and

- 5 dispensing the water from the second dispenser on the wafer surface, after applying the cleaning composition and before conducting CMP on another wafer.

23. The apparatus according to claim 21, further comprising a pad conditioner adapted to condition the polishing pad, wherein the controller is further programmed for conditioning the polishing pad with the pad conditioner at least one of before, during and after applying the cleaning composition.

24. The apparatus according to claim 19, wherein the composition is a solution having a pH of about 5.0 to about 12.0 and comprises:

- ethylenediamine;  
 an acid selected from the group consisting of phosphoric acid, acetic acid  
 5 and sulfuric acid, or a base selected from the group consisting of potassium hydroxide, sodium hydroxide and ammonium hydroxide; and  
 the remainder water.

apply the cleaning composition to a rotating polishing pad at a flow rate of about 100 to about 600 ml/min. for about 3 seconds to about 20 seconds after conducting  
5 CMP on each of a plurality of wafers; and  
rinsing by applying pressurized water to the polishing pad surface for about 2 seconds to about 20 seconds.

## ABSTRACT OF THE DISCLOSURE

A polishing pad is cleaned of Cu CMP by-products, subsequent to planarizing a wafer, to reduce pad-glazing by applying to the polishing pad surface a composition comprising about 0.1 to about 3.0 wt.% of at least one organic compound having one or more amine or amide groups, an acid or a base in an amount sufficient to adjust the pH of the composition to about 5.0 to about 12.0, the remainder water. Embodiments comprise ex situ cleaning of a rotating polishing pad by applying a solution having a pH of about 5.0 to about 12.0 at a flow rate of about 100 to about 600 ml/min. for about 3 to about 20 seconds after polishing a wafer having a Cu-containing surface and then removing the cleaning solution from the polishing pad by high pressure rinsing with water.



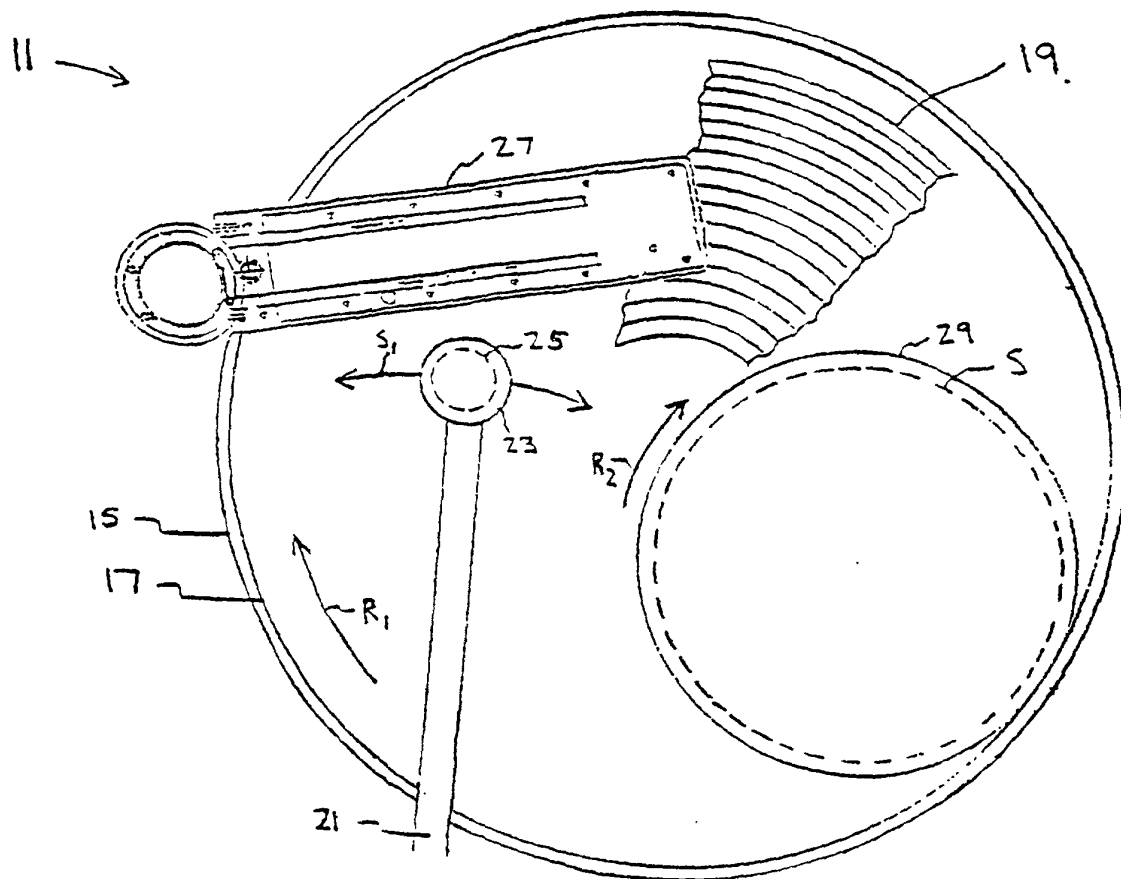


FIG. 1  
(PRIOR ART)

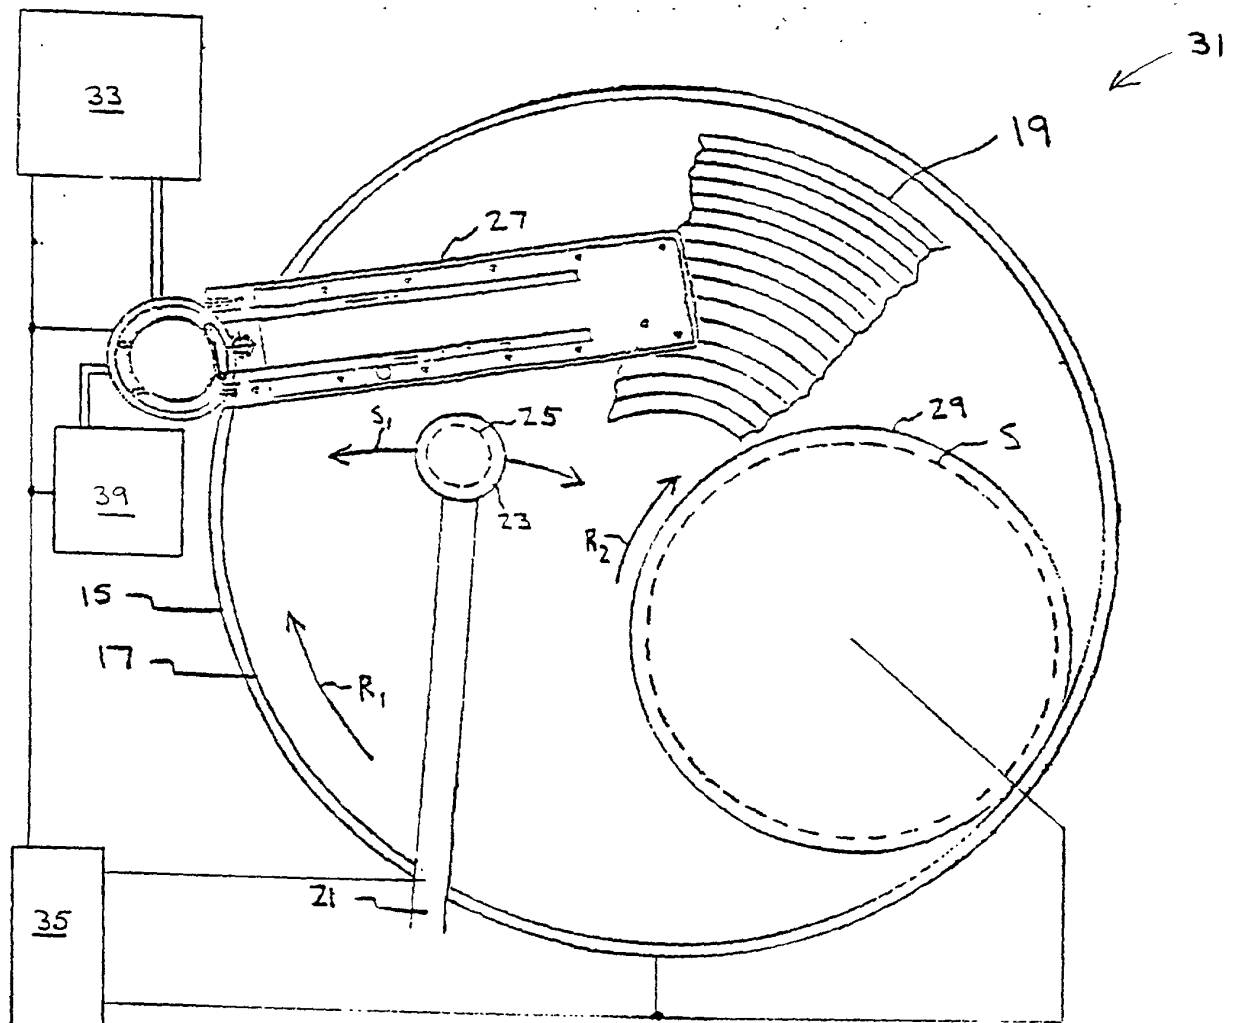


FIG. 2

**COMBINED DECLARATION AND POWER OF ATTORNEY**

**As a below named inventor, I hereby declare that:**

This declaration is of the following type:

- ☒ original
- ☐ divisional
- ☐ continuation
- ☐ continuation-in-part

**INVENTORSHIP IDENTIFICATION**

My residence, post office address and citizenship are as stated below next to my name. I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**TITLE OF INVENTION**

CU CMP POLISHING PAD CLEANING

**SPECIFICATION IDENTIFICATION**

The specification of which:

- ☒ is attached hereto
- ☐ was filed on, under Serial No., executed on even date herewith; or ☐ Express Mail No.(as Serial No. not yet known) and was amended on \_\_\_\_\_ (if applicable)
- ☐ was described and claimed in PCT International Application No. \_\_\_\_\_ filed on \_\_\_\_\_ and as amended under PCT Article 19 on \_\_\_\_\_.

**ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR**

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, 1.56,

and which is material to the examination of this application; namely, information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent, and

- ☐ In compliance with this duty there is attached an Information Disclosure Statement in accordance with 37 CFR 1.98.

### PRIORITY CLAIM (35 U.S.C. §119)

I hereby claim foreign priority benefits under Title 35, United States Code, §119, of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America or of any United States Provisional Application(s) listed below, and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

- ☒ No such applications have been filed.  
☐ Such applications have been filed as follows:

**A. Prior foreign/PCT/provisional application(s) filed within 12 mos. (6 mos. for design) prior to this application, and any priority claims under 35 U.S.C. § 119**

<u>Country/PCT</u>	<u>Application</u>	<u>Date Filed</u>	<u>Priority Claimed</u>
	<u>No</u>		<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

**B. All foreign application(s), if any, filed more than 12 mos. (6 mos for design) prior to this U.S. application**

Country:  
Application No:  
Filing date:

### PRIORITY CLAIM (35 U.S.C. §120)

I hereby claim the benefit under Title 35, United States Code, § 120, of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information that is material to the examination of this application (namely, information where there is substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

- ☒ No such applications have been filed  
☐ Such applications have been filed, as follows:

<u>Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
		<u>Patented Pending</u> <u>Abandoned</u>

## POWER OF ATTORNEY

I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Peter J. Sgarbossa	Registration No. 25,610
Donald Verplancken	Registration No. 33,217
Lawrence Edelman	Registration No. 25,226
Michael B. Einschlag	Registration No. 29,301
Joseph Bach	Registration No. 37,771
Raymond Kam-On Kwong	Registration No. 37,165
James C. Wilson	Registration No. 35,412
Robert W. Mulcahy	Registration No. 25,436
Stephen A. Becker	Registration No. 26,527
Arthur J. Steiner	Registration No. 26,106
John A. Hankins	Registration No. 32,029
Michael A. Messina	Registration No. 33,424

### Send correspondence to:

Patent Counsel, MS/2061  
Legal Affairs Dept.  
Applied Materials, Inc.  
POBox 450A  
Santa Clara, CA 95052

### Direct telephone calls to:

(202) 756-8624

## DECLARATION


*I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and, further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Sec. 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.*

Full name of sole or first inventor: Lizhong Sun

Inventor's

Date: 08/17/2000

signature: \_\_\_\_\_

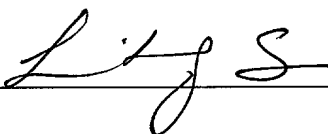

Residence:

Sunnyvale, California

Post Office Address: ~~575 E. Remington Drive, #22C~~

~~Sunnyvale, CA 94087~~

U.S.A.

952 Windsor Hills Cir  
San Jose, CA 95123

Country of Citizenship: China

Full name of **second** inventor: Shijian Li

Inventor's signature: Li Shijian  
Date: Aug 17, 2000

Residence: San Jose, California  
Post Office Address: 1202 Donington Drive  
San Jose, CA 95129  
U.S.A.

Country of Citizenship: ~~China~~ U.S.A .

Full name of **third** inventor: Fred C. Redeker

Inventor's signature: Fred C. Redeker  
Date: Aug 17, 2000

Residence: Fremont, California  
Post Office Address: 1801 Sioux Dr.  
Fremont, CA 94539  
U.S.A.

Country of Citizenship: USA

(Declaration ends with this page)